

CRAWLER EXCAVATOR

HX300AL



READY TO CHANGE THE WORLD

The HX300AL Crawler Excavator is part of Hyundai's brand new A-series: a fresh generation of construction equipment that complies with the European stage V emission levels. But it does much more than that! While fulfilling regulatory demands, Hyundai aimed for a ground-breaking level of customer satisfaction with maximum performance and productivity, better safety, more convenience and improved uptime management.

From its robust exterior design to its smart performance-enhancing technologies, the HX300AL opens up a world of new possibilities where tiny efforts move mountains. It's time to experience the Hyundai Effect!



ENTER A WORLD WHERE ANYTHING IS POSSIBLE



Productivity

- Short cycle times
- Mono or two-piece boom
- Electronic Pump Independent Control (EPIC)
- Customisable hydraulic attachment lines
- Attachment flow control (20 tools programmable)
- Fine swing control (option)
- Boom floating system (option)

Serviceability

- Excellent accessibility
- Electric fuel filler pump with automatic stop function
- Centralised greasing (option)
- Hi Mate telematic system
- Extended service intervals

Durability/Safety

- Excellent visibility
- AAVM camera system (option)
- LED lights (option)
- Reinforced upper and lower structure
- High-grade hoses
- Reinforced pins, bushings and polymer shims
- Swing lock (option)

Comfort




- Spacious cabin
- 8" touchscreen monitor
- Automatic climate control
- Smart key and start/stop button
- Air suspension seat with heater (option)
- Viscous cab suspension mounts
- Ergonomic joystick design

POWER AND EFFICIENCY TO MAKE YOU MORE PRODUCTIVE

The HX300AL is powered by a robust Stage V-certified Cummins engine with an innovative integrated after-treatment system that reduces both emissions and maintenance requirements. It delivers all the power you need to handle demanding jobs, along with fast levelling and truck loading times and excellent fuel economy.

A range of smart technologies are included for precise management of the engine output and pump flow rate. A new EPIC (Electronic Pump Independent Control) system improves efficiency through computerised individual control of the hydraulic pumps. Additional features optimise operation and monitoring to enhance productivity every single day.

EPIC (Electronic Pump Independent Control) improves fuel efficiency while maintaining productivity through computerised individual control of hydraulic pumps. The system helps to reduce losses in hydraulic flow and maximise production capacity.

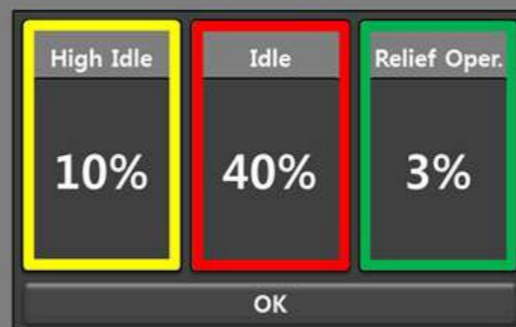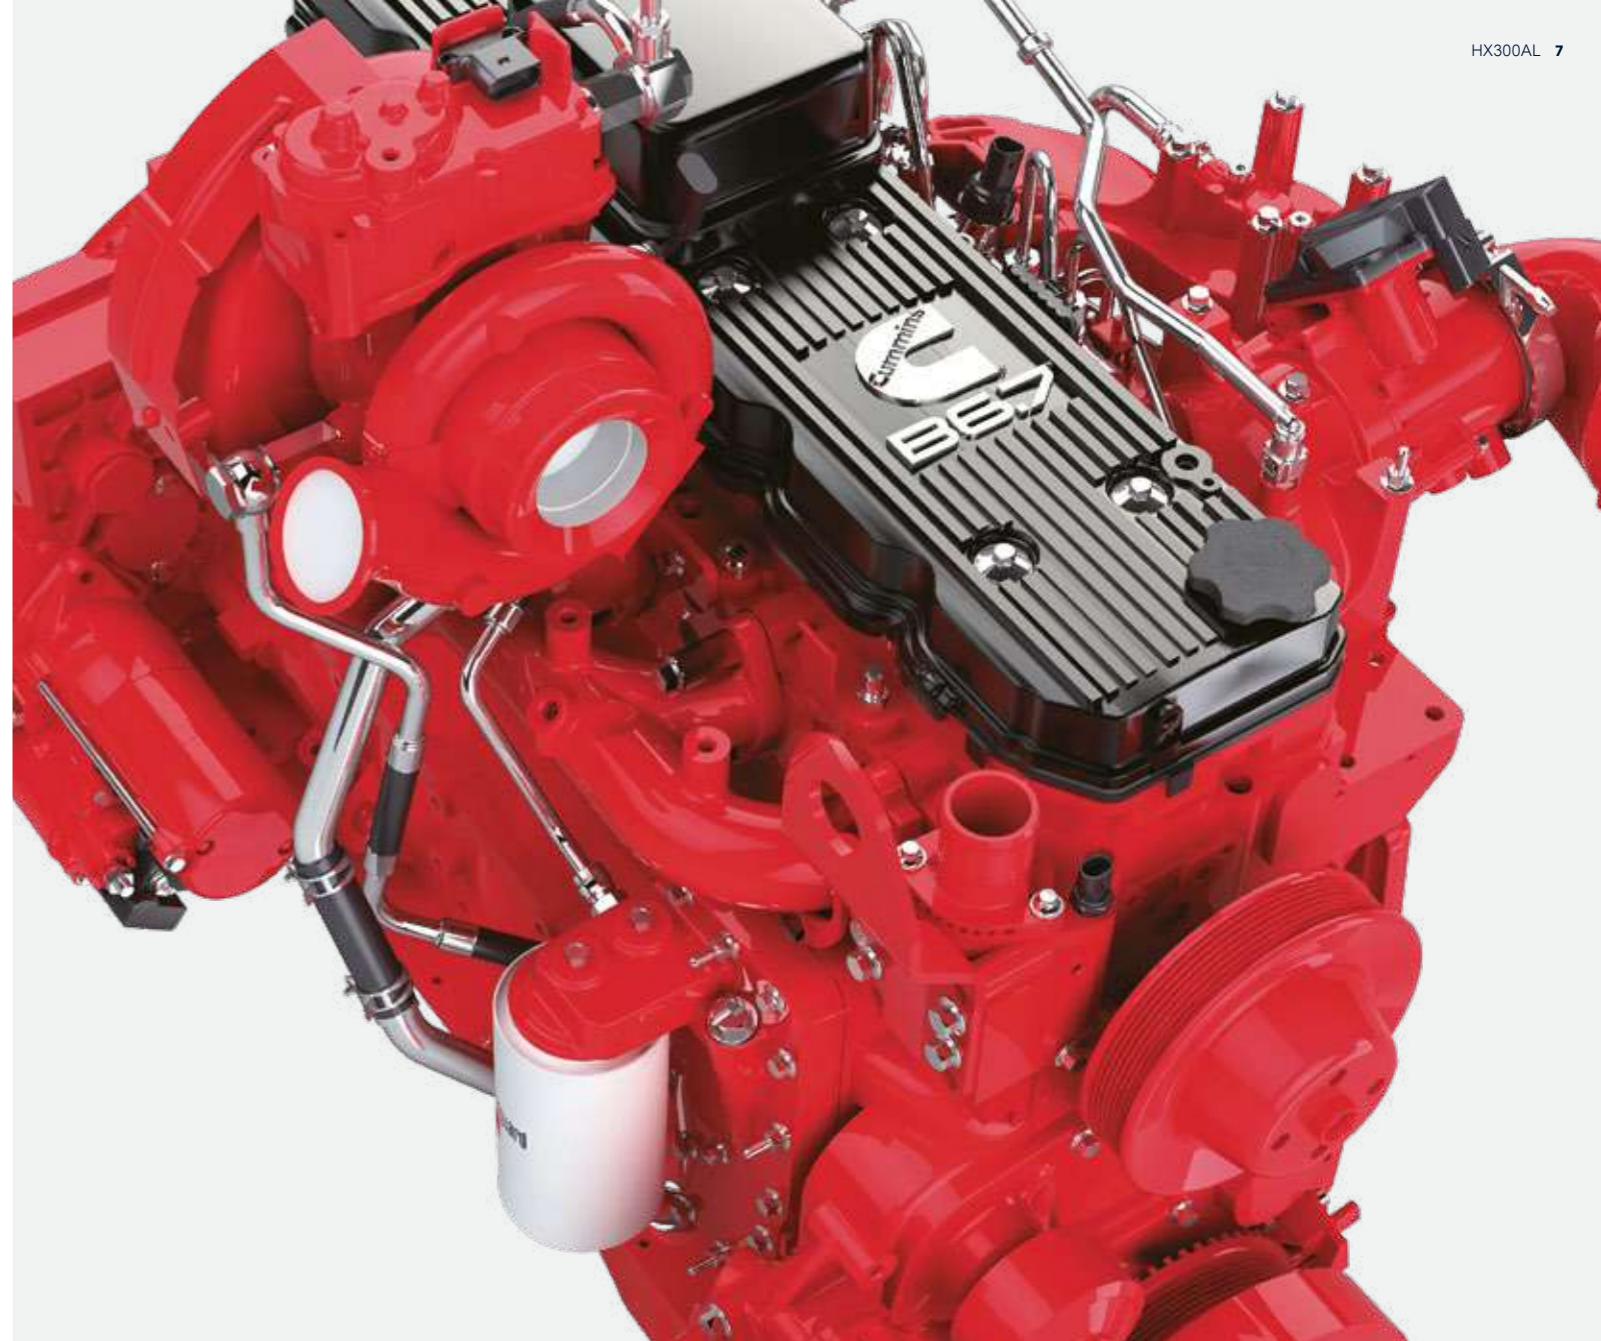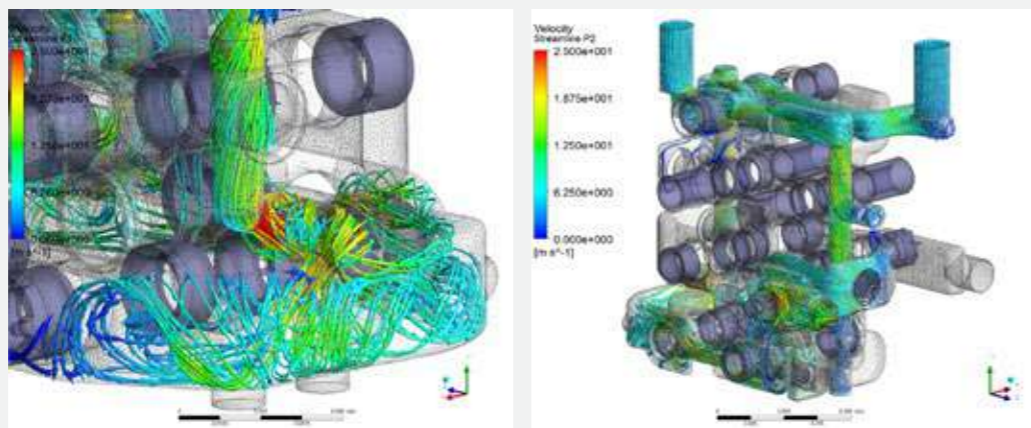

"I'm saving on fuel and reducing emissions without having to compromise on productivity!"

The **Eco Report** feature helps you to develop efficient working habits by displaying real-time information about machine performance.


Like all A-Series machines, the HX300AL features our **all-in-one exhaust aftertreatment system** which cuts emissions and operating costs while enhancing reliability and simplifying maintenance.

Easy-to-use **3D Machine Guidance** gives precise feedback on the bucket position as well as 3D grading assistance and jobsite mapping in real time. This reduces manpower requirements on site and enhances operator performance. The system includes an optional **Hyundai Ready automatic surveying system** for excavators which provides work guides to further improve work speed and productivity.

- Productivity Improvement
- Work Time Reduction
- Leveling Cost Reduction
- Safety Improvement

A CABIN DESIGNED AROUND YOU

The HX300AL cabin was designed as a comfortable working environment that enhances productivity and reduces fatigue for every operator. Pleasant and spacious, it features a high-quality, adjustable seat and comfortable reach to all controls. A range of technologies enable easier machine monitoring, while the audio system includes radio, USB and AUX input to keep you entertained during your working day. The overall design places you right at the centre of the Hyundai Effect, with a world of convenience and control at your fingertips.

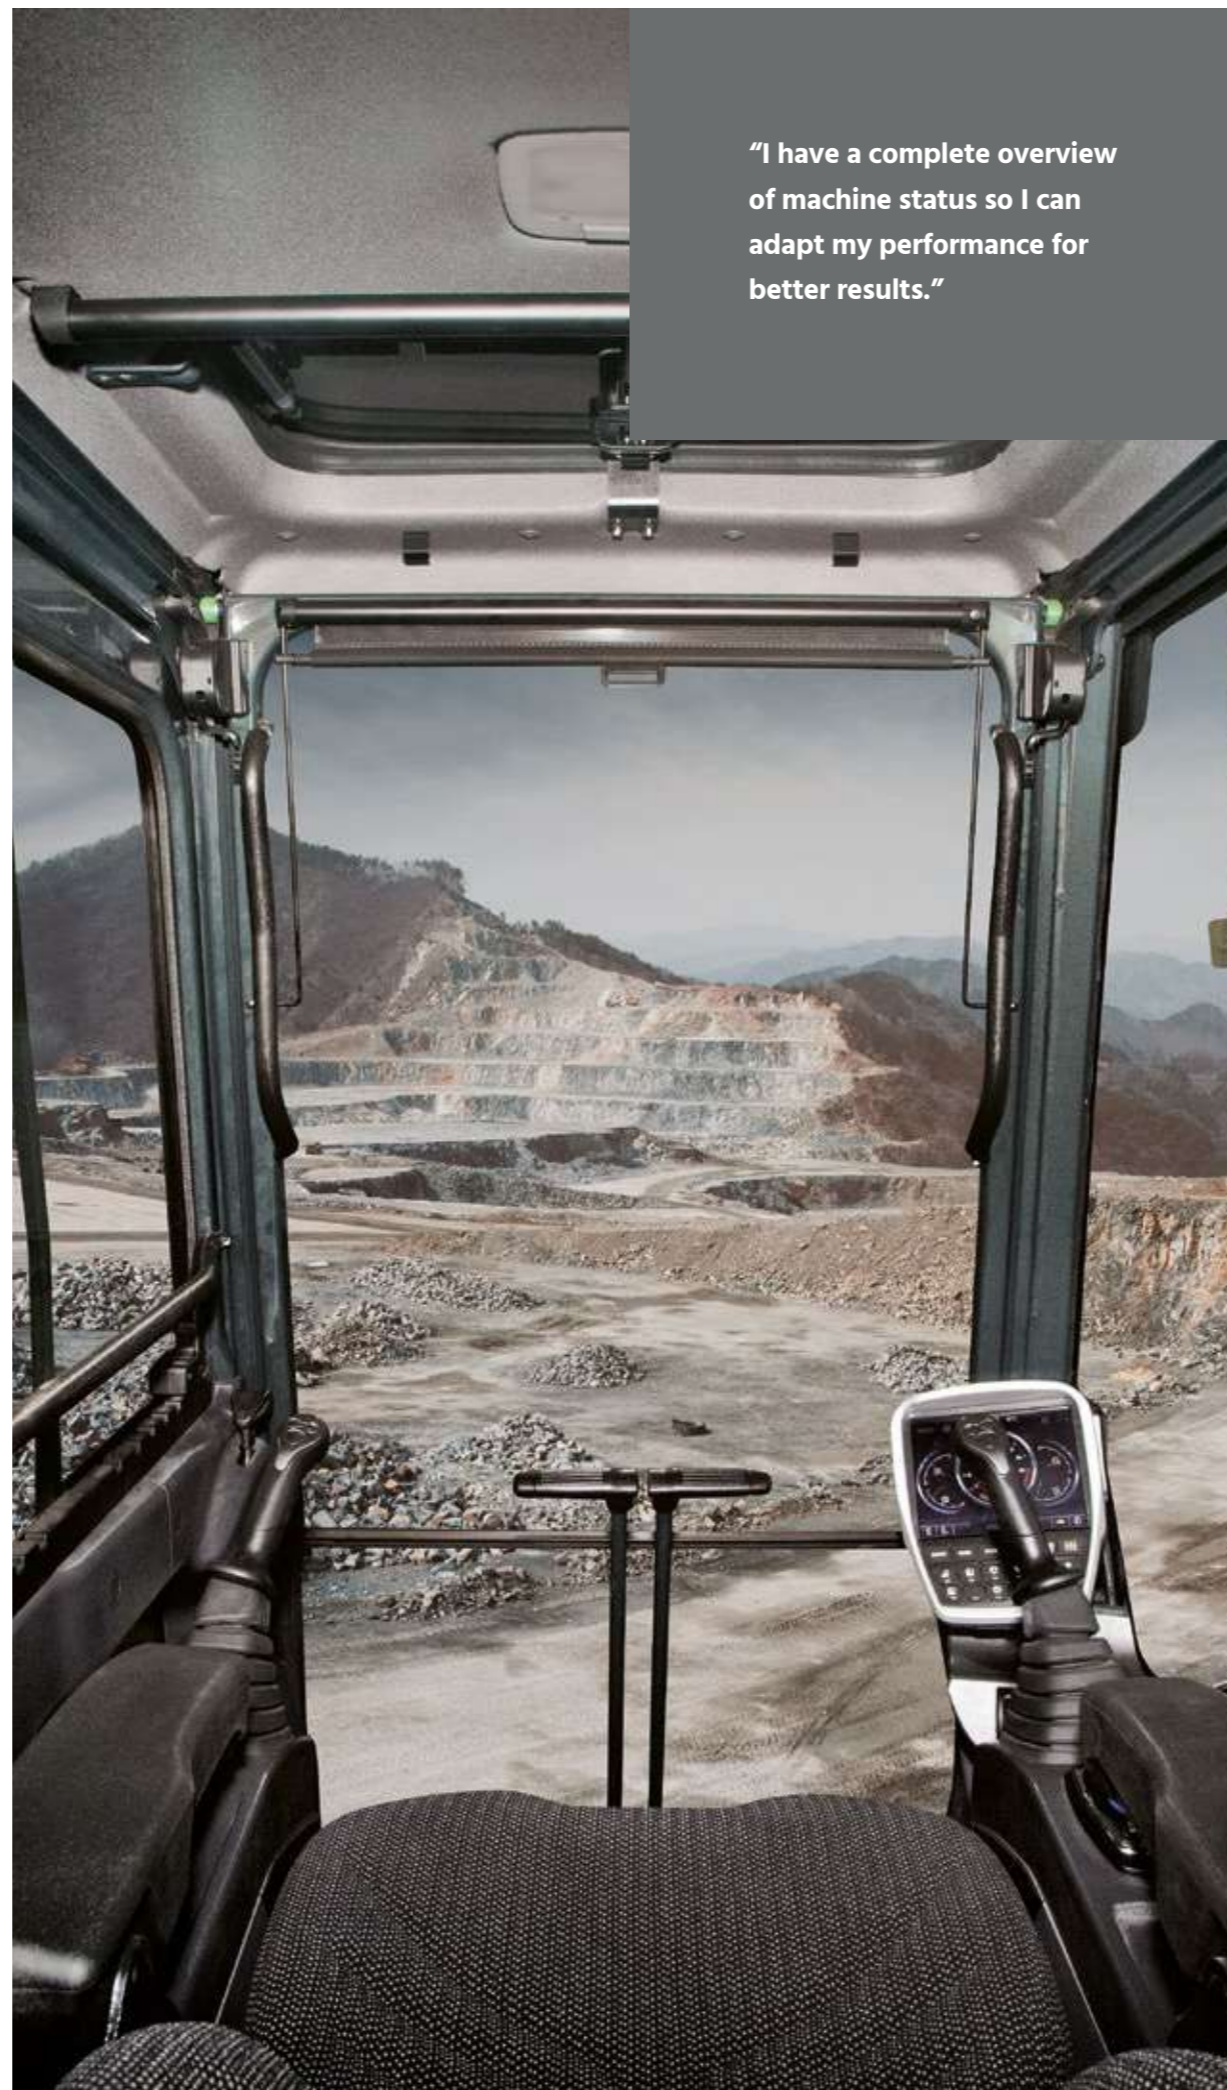

"I have a complete overview of machine status so I can adapt my performance for better results."



- ▶ The **instrument panel** is optimised to provide quick, easy access to machine status information as you work. It features an 8-inch **touchscreen monitor** for excellent legibility.



- ▶ **Menu functions** can be set by the machine owner, who can also provide or restrict access for machine users by using a password to lock or unlock the list.



- ▶ The HX300AL has a luxurious **air suspension seat with heating** as standard. The **ergonomic joystick** makes operation comfortable and intuitive.



- ▶ The **heating and air conditioning** system efficiently regulates and directs airflow in the cabin.

The **Miracast system based on the operator's smartphone Wi-Fi** allows the use of various smartphone features on the screen, including navigation, web surfing and music and video playback.



PROTECTION FOR CO-WORKERS AND MACHINERY

Small details can make a huge difference when it comes to safety and security. The HX300AL offers all-round protection for you, your workmates and your equipment. Its cab and engine hood feature a new design that allows maximum visibility, while

All-Around View Monitoring (AAVM) gives you a clear overview of your surroundings. By helping to ensure an accident-free worksite, the HX300AL contributes to the peace of mind and productivity that form part of the Hyundai Effect.

The **All-Around View Monitoring (AAVM)** camera system gives you a 360° overview of your immediate working environment. It also includes Intelligent Moving Object Detection (IMOD) technology that senses and warns you when people or objects come within five metres of the machine.

The **open design of the cabin side door** gives the operator a clear, unimpeded view to the exterior. The **door handle** design has also been redesigned for more convenient access.



"I can always see what's going on around me, even when weather conditions are poor or the machine is moving."




The **auto safety lock** feature prevents unintentional ignition. While the auto safety lock is activated, the excavator is not controlled by the RCV lever.



ADVANCED DIAGNOSTICS AND SERVICING SUPPORT

The peace of mind that comes with quick, low-effort servicing is also part of the Hyundai Effect. The HX300AL is designed to make maintenance as convenient as possible. All components and materials have been optimised to ensure a long, trouble-free life. Hyundai's Hi Mate remote management system uses GPS satellite technology to provide the highest level of service and support. The HX300AL also features our new Engine Connected Diagnostics (ECD) system which immediately reports any engine failure to both Hi Mate and the engine manufacturer to ensure the fastest, easiest resolution.

HiMATE

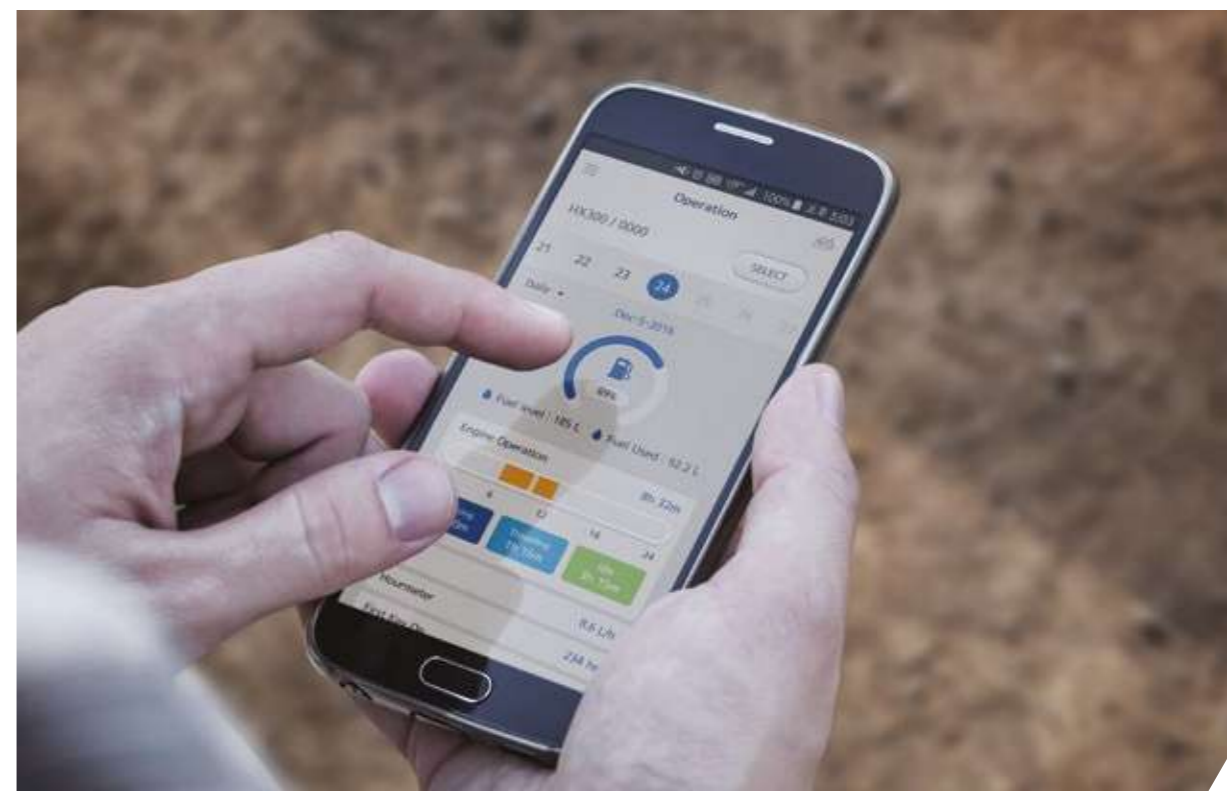

For maximum convenience and security, the HX300AL features Hyundai's exclusive Hi Mate remote fleet management system, which uses mobile data technology to provide the highest level of service and support. You can monitor your machines from any location via a dedicated website or mobile app, with access to working parameters like total engine hours, machine utilisation, actual performed working hours and fuel consumption and machine location. The system makes it easy to evaluate machine productivity and plan servicing and maintenance tasks, as well as any required cost saving measures. It also offers geofencing to protect your machines against theft and unauthorised usage.



"I have a constant overview of performance and maintenance requirements - plus advice and support whenever I need it."

ECD (Engine Connected Diagnostics) provides troubleshooting advice as well as tailored servicing and parts support from Cummins Quick Serve. Service technicians are supported with remote diagnostics reports allowing them to prepare for site visits and bring the right tools.



READY FOR ACTION AND BUILT TO LAST

You need to know that the investment you make today will help to sustain your business over the long term. That's why we prioritised reliability throughout the development of the HX300AL, from design and manufacturing to quality control. We improved engine reliability by integrating exhaust after-treatment and replacing EGR with a simplified, single-module system that's easier to maintain. The upper and lower frame structures are reinforced for high load work, while the attachments have been rigorously tested for the roughest conditions. The overall aim is to minimise downtime and repairs so that you can stay on schedule, avoid unexpected costs and protect your profits.



“Every detail has been reviewed and revised for reliable long-term performance. It means I can keep my promises and have better control of my equipment costs.”

The engine and **exhaust after-treatment** system are integrated for simplified control and maintenance.



High-grade hoses with outstanding resistance to heat and pressure provide maximum durability, even in rough working conditions.



The reinforced **pins, bushings and polymer shims** are designed for an extended lifetime.



FOCUSED TECHNOLOGIES FOR THE RESULTS YOU WANT

Hyundai's crawler excavators are designed to create better conditions for operators and deliver the ultimate ownership experience. Every detail is carefully fine-tuned to match your needs in the field, including better safety and comfort, higher productivity, maximum uptime and easy servicing. It's all part of the Hyundai Effect.

Explore the range at www.hyundai.eu/en



SPECIFICATIONS

ENGINE			
Maker / Model	Cummins B6.7 / STAGE V		
Type	4-cycle turbocharged, charge air cooled diesel engine		
Rated Flywheel Horse Power	SAE	J1,995 (Gross)	260 HP (194 kW) at 2,200 rpm
		J1,349 (Net)	255 HP (190 kW) at 2,200 rpm
	DIN	6,271/1 (Gross)	264 PS (194 kW) at 2,200 rpm
		6,271/1 (Net)	259 PS (190 kW) at 2,200 rpm
Max. Power	265 HP (198 kW) at 2,000 rpm		
Max. Torque	138 kgf m (966 lbf ft) at 1,500 rpm		
Bore X Stroke	107 x 124 mm (4.21" x 4.88")		
Piston Displacement	6,700 cc (409 cu in)		
Batteries	2 x 12 V x 160 Ah		
Starting Motor	Denso 24 V-4.8 kW		
Alternator	Denso 24 V-9.5 A		

HYDRAULIC SYSTEM	
MAIN PUMP	
Type	Variable displacement tandem axis piston pumps
Max. Flow	2 x 285 l/min (75.3 U.S. gpm / 62.7 U.K. gpm)
Sub-Pump For Pilot Circuit	Gear pump
Cross-sensing and fuel saving pump system.	

HYDRAULIC MOTORS	
Travel	Variable displacement axial piston motor
Swing	Axial piston motor

RELIEF VALVE SETTING	
Implement Circuits	350 kgf/cm ² (4,980 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power Boost (Boom, Arm, Bucket)	380 kgf/cm ² (5,400 psi)
Swing Circuit	300 kgf/cm ² (4,270 psi)
Pilot Circuit	40 kgf/cm ² (570 psi)
Service Valve	Installed

HYDRAULIC CYLINDERS	
No. of Cylinder Bore X Stroke	Boom: Ø140 x 1,465 mm
	Arm: Ø150 x 1,765 mm
	Bucket: Ø135 x 1,185 mm

DRIVING AND BRAKING	
Drive Method	Fully hydrostatic type
Drive Motor	Axial piston motor, in-shoe design
Reduction System	Planetary reduction gear
Max. Drawbar Pull	27,405 kgf (60,417 lbf)
Max. Travel Speed (High / Low)	6.1 km/hr (3.8 mph) / 3.4 km/hr (2.1 mph)
Gradeability	35° (70%)
Parking Brake	Multi wet disc

CONTROL	
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.	
Pilot control	Two joysticks with one safety lever (LH): swing and arm, (RH): Boom and bucket
Traveling and Steering	Two levers with pedals
Engine Throttle	Electric, dial type

SWING SYSTEM	
Swing Motor	Fixed displacement axial piston motor
Swing Reduction	Planetary gear reduction
Swing Bearing Lubrication	Grease-bathed
Swing Brake	Multi wet disc
Swing Speed	11.2 rpm

COOLANT & LUBRICANT CAPACITY			
	liter	US gal	UK gal
Fuel tank	500	132.1	110
Engine coolant	42	11.1	9.3
Engine oil	24.4	6.4	5.4
Swing Device	11	2.9	2.4
Final Drive (Each)	7.8	2.06	1.72
Hydraulic system (including tank)	330	87.2	72.6
Hydraulic tank	190	50.2	41.8
DEF/AdBlue®	70	18.5	15.5

UNDERCARRIAGE	
The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.	
Center frame	X - leg type
Track frame	Pentagonal box type
Number of Shoes on each side	48 EA
Number of Carrier Rollers on each side	2 EA
Number of Track Rollers on each side	9 EA
Number of Rail Guards on each side	2 EA

OPERATING WEIGHT (APPROXIMATE)					
Shoes	Type	Width mm (in)	Operating weight		Ground pressure
			kg (lb)	kgf/cm ² (psi)	
Triple grouser	600 (24")		HX300AL	30,520 (67,290)	0.59 (8.35)
			HX300AL 2pcs boom	33,670 (74,230)	0.65 (9.22)
			HX300A NL	30,400 (67,020)	0.59 (8.32)
			HX300A NL 2pcs boom	33,550 (73,970)	0.65 (9.18)
	700 (28")		HX300AL	31,080 (68,520)	0.51 (7.29)
			HX300AL 2pcs boom	34,230 (75,460)	0.56 (8.03)
			HX300AL	31,450 (69,340)	0.45 (6.46)
			HX300AL 2pcs boom	34,600 (76,280)	0.50 (7.10)
	800 (32")		HX300AL Long Reach	33,590 (74,050)	0.48 (6.90)
			HX300AL	31,840 (70,200)	0.41 (5.85)
			HX300AL 2pcs boom	34,990 (77,140)	0.45 (6.39)
			HX300AL HW	34,810 (76,740)	0.57 (8.15)
Double grouser	700 (28")				


AIR CONDITIONING SYSTEM	
The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential: 1.430) The system holds 0.8 kg refrigerant consisting of a CO ₂ equivalent of 1.14 metric tonnes. For more information, Please refer to the manual.	



DIMENSIONS & WORKING RANGE

HX300AL / HX300ANL DIMENSIONS

6.25 m (20' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 3.05 m (10' 0"), 3.75 m (12' 4") ARM

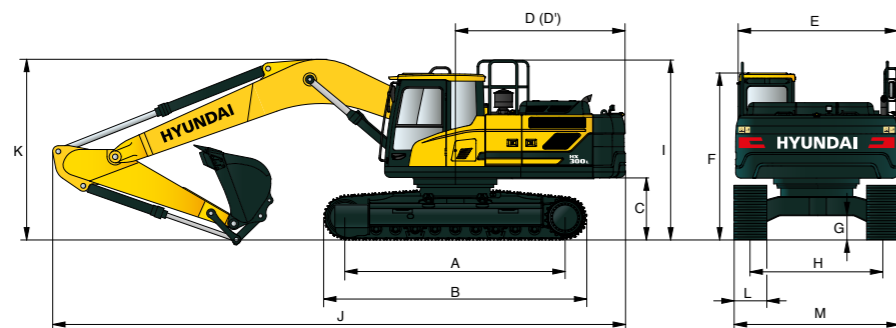

Unit : mm (ft in)


A	Tumbler distance	3,650 (12' 0")
B	Overall length of crawler	4,404 (14' 4")
C	Ground clearance of counterweight	1,060 (3' 6")
D	Tail swing radius	2,890 (9' 5")
D'	Rear-end length	2,770 (9' 1")
E	Overall width of upperstructure	2,740 (9' 0")
F	Overall height of cabin	3,000 (9' 8")
G	Min. ground clearance	480 (1' 7")
H	Track gauge	HX300AL 2,600 (8' 6") HX300ANL 2,390 (7' 10")
I	Overall height of guardrail	3,335 (10' 11")

Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
J	Overall length	10,750 (35' 3")	10,700 (35' 1")	10,600 (34' 9")	10,670 (35' 0")
K	Overall height of boom	3,720 (12' 2")	3,560 (11' 8")	3,320 (10' 11")	3,570 (11' 9")
L	Track shoe	Triple grouser			
	width	600 (1' 12")	700 (2' 4")	800 (2' 7")	900 (2' 11")
M	Overall width	HX300AL 3,200 (10' 6")	3,300 (10' 10")	3,400 (11' 1")	3,500 (11' 5")
		HX300ANL 2,990 (9' 10")	-	-	-

DIMENSIONS & WORKING RANGE

HX300AL LONG REACH DIMENSIONS

10.2 m (33' 6") BOOM and 7.85 m (25' 9") ARM

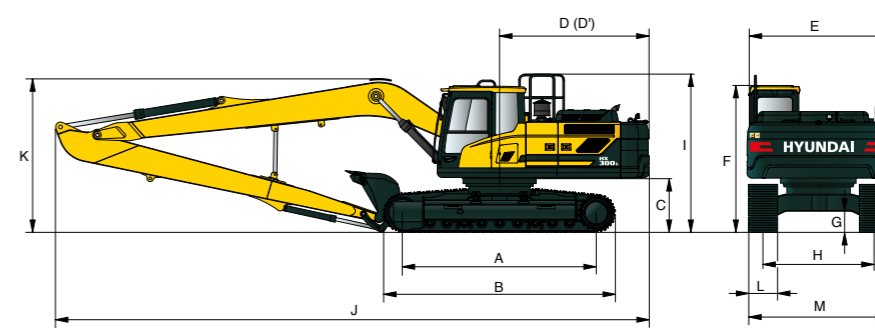


Unit : mm (ft in)

A	Tumbler distance	4,030 (13' 3")
B	Overall length of crawler	4,940 (16' 2")
C	Ground clearance of counterweight	1,185 (3' 9")
D	Tail swing radius	3,210 (10' 5")
D'	Rear-end length	3,120 (10' 3")
E	Overall width of upperstructure	2,980 (9' 9")
F	Overall height of cabin	3,130 (10' 3")
G	Min. ground clearance	500 (1' 8")
H	Track gauge	2,600 (8' 6")
I	Overall height of guardrail	3,335 (10' 9")

Boom length		10,200 (33' 6")
Arm length		7,850 (25' 9")
J	Overall length	14,600 (47' 11")
K	Overall height of boom	3,560 (11' 8")
L	Track shoe width	800 (2' 7")
M	Overall width	3,400 (11' 2")

HX300AL / HX300ANL WORKING RANGE


Unit : mm (ft in)

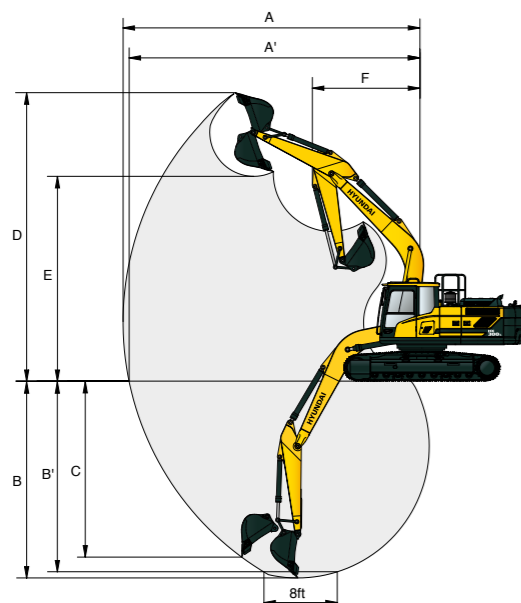

Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A	Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,810 (35' 6")	11,420 (37' 6")
A'	Max. digging reach on ground	9,820 (32' 3")	10,100 (33' 2")	10,610 (34' 10")	11,230 (36' 10")
B	Max. digging depth	6,380 (20' 11")	6,780 (22' 3")	7,330 (24' 1")	8,030 (25' 4")
B'	Max. digging depth (8' level)	6,180 (20' 3")	6,600 (21' 8")	7,170 (23' 6")	7,890 (25' 11")
C	Max. vertical wall digging depth	5,910 (19' 5")	5,760 (18' 11")	6,280 (20' 7")	6,990 (22' 11")
D	Max. digging height	10,130 (33' 3")	9,980 (32' 9")	10,200 (33' 6")	10,410 (34' 2")
E	Max. dumping height	6,990 (22' 11")	6,930 (22' 9")	7,150 (23' 5")	7,360 (24' 2")
F	Min. front swing radius	4,420 (14' 6")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")

HX300AL / HX300ANL LONG REACH WORKING RANGE

Unit : mm (ft in)

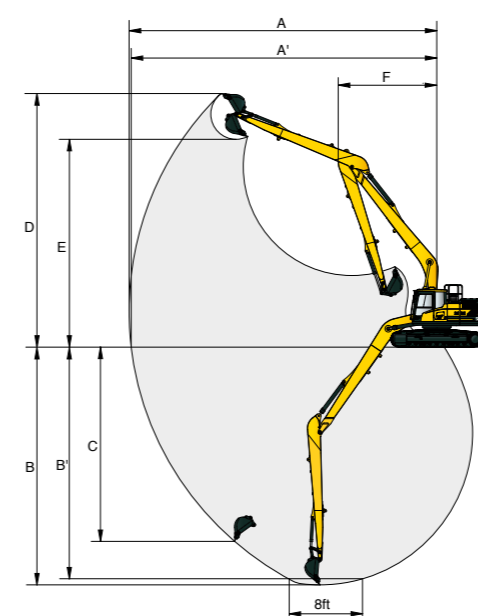


Boom length		10,200 (33' 6")
Arm length		7,850 (25' 9")
A	Max. digging reach	18,530 (60' 10")
A'	Max. digging reach on ground	18,410 (60' 5")
B	Max. digging depth	14,740 (48' 4")
B'	Max. digging depth (8' level)	14,660 (48' 1")
C	Max. vertical wall digging depth	13,700 (44' 11")
D	Max. digging height	14,590 (47' 10")
E	Max. dumping height	12,270 (40' 3")
F	Min. front swing radius	6,270 (20' 7")

DIMENSIONS & WORKING RANGE

HX300AL HIGH WALKER DIMENSIONS

6.25 m (20' 6") BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 3.05 m (10' 0"), 3.75 m (12' 4") ARM

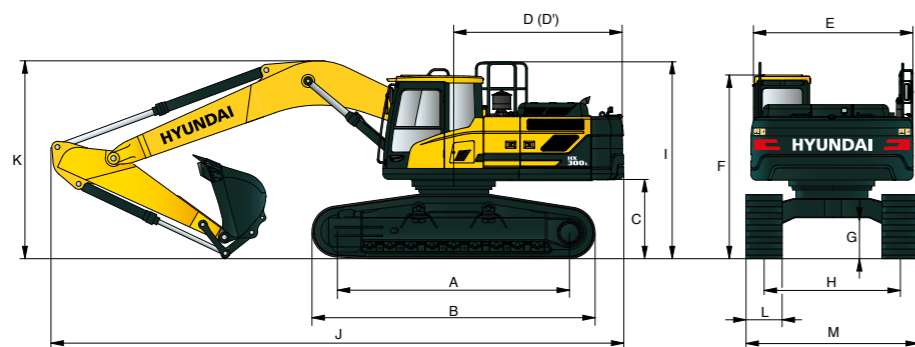


Unit : mm (ft in)

A	Tumbler distance	4,030 (13' 3")
B	Overall length of crawler	4,940 (16' 2")
C	Ground clearance of counterweight	1,490 (4' 9")
D	Tail swing radius	3,210 (10' 5")
D'	Rear-end length	3,120 (10' 3")
E	Overall width of upperstructure	2,980 (9' 9")
F	Overall height of cabin	3,430 (11' 9")
G	Min. ground clearance	765 (2' 6")
H	Track gauge	2,870 (9' 5")
I	Overall height of guardrail	3,640 (11' 9")

Boom length		6,250 (20' 6")				10,200 (33' 6")
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")
J	Overall length	10,730 (35' 2")	10,640 (34' 11")	10,450 (34' 3")	10,530 (34' 7")	14,470 (47' 6")
K	Overall height of boom	3,830 (12' 7")	3,660 (12' 0")	3,440 (11' 3")	3,540 (11' 7")	3,610 (11' 10")
L	Track shoe	Type	Double grouser			
		Width	700 (2' 4")			
M	Overall width	3,570 (11' 9")				

HX300AL HIGH WALKER WORKING RANGE

Unit : mm (ft in)

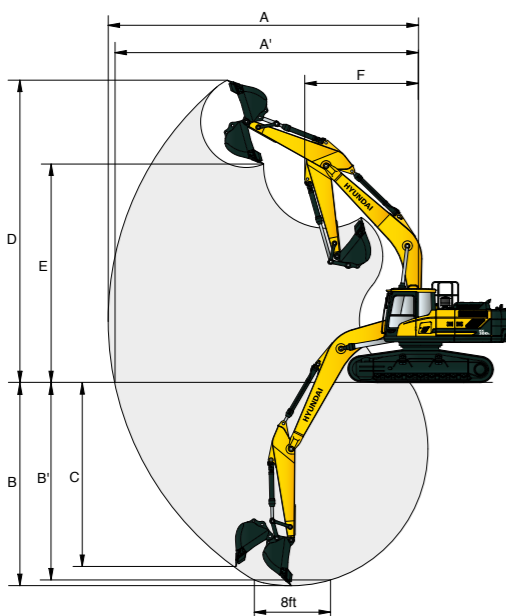


Boom length		6,250 (20' 6")				10,200 (33' 6")
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")
A	Max. digging reach	10,040 (32' 11")	10,310 (33' 10")	10,810 (35' 6")	11,420 (37' 6")	18,530 (60' 10")
A'	Max. digging reach on ground	9,750 (32' 0")	10,020 (32' 10")	10,540 (34' 7")	11,170 (36' 8")	18,370 (60' 3")
B	Max. digging depth	6,060 (19' 11")	6,460 (21' 2")	7,330 (24' 1")	7,710 (25' 4")	14,420 (47' 4")
B'	Max. digging depth (8' level)	5,860 (19' 3")	6,280 (20' 7")	7,170 (23' 6")	7,570 (24' 10")	14,340 (47' 1")
C	Max. vertical wall digging depth	5,590 (18' 4")	5,440 (17' 10")	6,280 (20' 7")	6,670 (21' 11")	13,380 (43' 11")
D	Max. digging height	10,450 (34' 3")	10,300 (33' 10")	10,200 (33' 6")	10,730 (35' 2")	14,910 (48' 11")
E	Max. dumping height	7,320 (24' 0")	7,250 (23' 9")	7,150 (23' 5")	7,680 (25' 2")	12,590 (41' 4")
F	Min. front swing radius	4,420 (14' 6")	4,320 (14' 2")	4,270 (14' 0")	4,220 (13' 10")	6,270 (20' 7")

DIMENSIONS & WORKING RANGE

HX300AL / HX300A NL 2-PIECE BOOM DIMENSIONS

6.25 m (20' 6") 2-Piece BOOM and 2.1 m (6' 11"), 2.5 m (8' 2"), 3.05 m (10' 0"), 3.75 m (12' 4") ARM

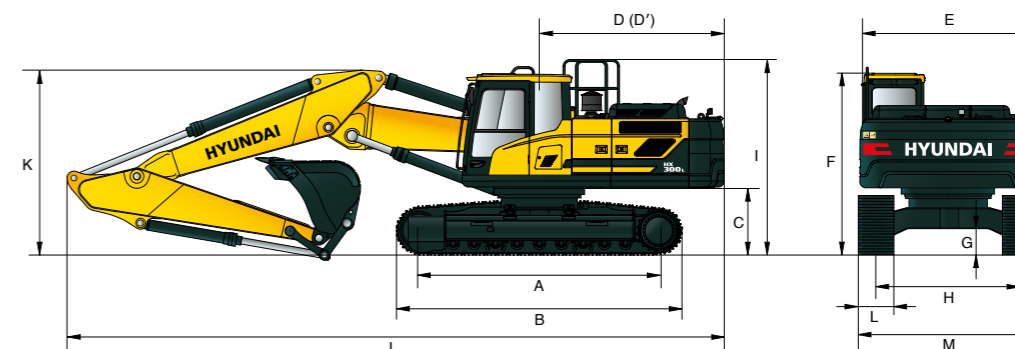


Unit : mm (ft in)

A	Tumbler distance	4,030 (13' 3")	
B	Overall length of crawler	4,940 (16' 2")	
C	Ground clearance of counterweight	1,185 (3' 9")	
D	Tail swing radius	3,210 (10' 5")	
D'	Rear-end length	3,120 (10' 3")	
E	Overall width of upperstructure	2,980 (9' 9")	
F	Overall height of cabin	3,130 (10' 3")	
G	Min. ground clearance	500 (1' 8")	
H	Track gauge	HX300AL	2,600 (8' 6")
		HX300ANL	2,390 (7' 10")
I	Overall height of guardrail	3,335 (10' 11")	

Boom length		6,250 (20' 6")			
Arm length		3,050 (10' 0")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
J	Overall length	10,740 (35' 3")	10,700 (35' 1")	10,650 (34' 11")	10,670 (35' 0")
K	Overall height of boom	3,510 (11' 6")	3,420 (11' 3")	3,290 (10' 10")	3,580 (11' 9")
L	Track shoe width	Triple grouser			
		600 (1' 12")	700 (2' 4")	800 (2' 7")	900 (2' 11")
M	Overall width	HX300AL	3,200 (10' 6")	3,300 (10' 10")	3,400 (11' 2")
		HX300ANL	2,980 (9' 9")	-	-

HX300AL / HX300A NL 2-PIECE BOOM DIMENSIONS WORKING RANGE

Unit : mm (ft in)

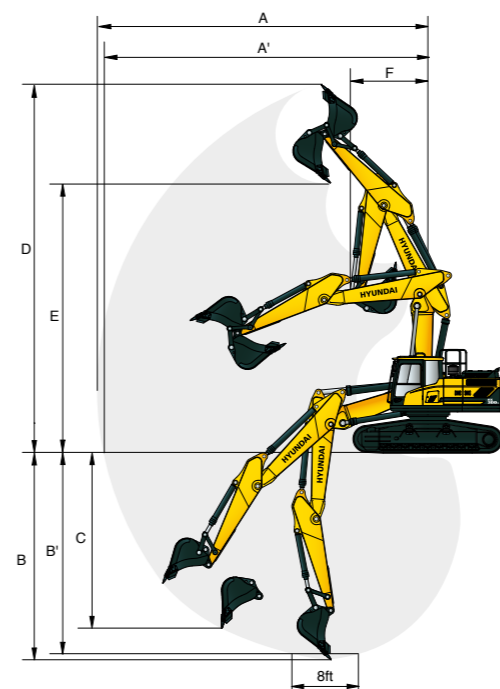

Boom length		6,250 (20' 6")			
Arm length		2,100 (6' 11")	2,500 (8' 2")	3,050 (10' 0")	3,750 (12' 4")
A	Max. digging reach	10,080 (33' 1")	10,360 (34' 0")	10,870 (35' 8")	11,500 (37' 9")
A'	Max. digging reach on ground	9,860 (32' 4")	10,150 (33' 4")	10,670 (35' 0")	11,310 (37' 1")
B	Max. digging depth	5,870 (19' 3")	6,220 (20' 5")	6,760 (22' 2")	7,440 (24' 5")
B'	Max. digging depth (8' level)	5,760 (18' 11")	6,120 (20' 1")	6,670 (21' 11")	7,350 (24' 1")
C	Max. vertical wall digging depth	4,950 (16' 3")	5,150 (16' 11")	5,690 (18' 8")	6,390 (21' 0")
D	Max. digging height	11,590 (38' 0")	11,730 (38' 6")	12,140 (39' 10")	12,600 (41' 4")
E	Max. dumping height	8,360 (27' 5")	8,500 (27' 11")	8,910 (29' 3")	9,370 (30' 9")
F	Min. front swing radius	3,200 (10' 6")	2,920 (9' 7")	2,650 (8' 8")	2,870 (9' 5")

BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS

All buckets are welded with high-strength steel.



IMAGE REQUIRED

SAE heaped m ³ (yd ³)	1.27 (1.66)	◆ 1.27 (1.66)	◆ 1.28 (1.67)	■ 1.33 (1.74)	★ 0.52 (0.68)	0.55 (0.72)
	1.50 (1.96)	◆ 1.46 (1.91)		■ 1.50 (1.96)		
	1.73 (2.26)					
	1.85 (2.42)					

Capacity m ³ (yd ³)		Width mm (in)		Weight kg (lb)	Tooth EA	Recommendation mm (ft.in)							
						Mono				2pcs			L/Reach
SAE heaped	CECE heaped	Without side cutters	With side cutters			6,250 (20' 6") Boom				6,250 (20' 6") 2-Piece Boom			10,200 (33' 6") Boom
						2,100 Arm	2,500 Arm	3,050 Arm	3,750 Arm	2,100 Arm	2,500 Arm	3,050 Arm	7,850 Arm
1.27 (1.66)	1.11 (1.45)	1,325 (52)	1,410 (55.5)	1,135 (2,500)	5	●	●	○	■	●	●	●	-
1.50 (1.96)	1.30 (1.70)	1,515 (60)	1,600 (63.0)	1,225 (2,700)	5	○	○	■	▲	●	●	○	-
1.73 (2.26)	1.51 (1.98)	1,605 (63)	1,690 (66.5)	1,310 (2,890)	6	■	■	▲	-	○	○	■	-
1.85 (2.42)	1.61 (2.11)	1,700 (67)	1,780 (70.1)	1,355 (2,990)	6	■	▲	▲	-	○	○	■	-
◆ 1.27 (1.66)	1.11 (1.45)	1,380 (54)	-	1,305 (2,880)	5	●	●	○	■	●	●	●	-
◆ 1.46 (1.91)	1.28 (1.67)	1,535 (60)	-	1,395 (3,080)	5	○	○	■	▲	●	●	○	-
◆ 1.28 (1.67)	1.12 (1.46)	1,230 (48)	1,300 (51)	1,285 (2,830)	5	●	●	○	■	●	●	●	-
■ 1.33 (1.74)	1.16 (1.52)	1,420 (56)	-	1,490 (3,280)	5	○	○	■	▲	●	●	○	-
■ 1.50 (1.96)	1.30 (1.70)	1,550 (61)	-	1,575 (3,470)	5	■	■	▲	▲	●	●	○	-
★ 0.52 (0.68)	0.45 (0.59)	945 (37)	1,020 (40.2)	470 (1,040)	5	-	-	-	-	-	-	-	■
● 0.55 (0.72)	0.45 (0.59)	1,800 (71)	-	590 (1,300)	-	-	-	-	-	-	-	-	▲

- ◆ Heavy duty bucket
- Rock-Heavy duty bucket
- ★ Long reach bucket
- Slope finishing bucket
- Applicable for materials with density of 2,100 kgf/m³ (3,500 lbf/yd³) or less
- Applicable for materials with density of 1,800 kgf/m³ (3,000 lbf/yd³) or less
- Applicable for materials with density of 1,500 kgf/m³ (2,500 lbf/yd³) or less
- ▲ Applicable for materials with density of 1,200 kgf/m³ (2,000 lbf/yd³) or less

ATTACHMENT


Booms and arms are welded with a low-stress, full-box section design. 6,250 mm (20' 6"), 10,200 mm (33' 6") Booms and 2,100 mm (6' 11"), 2,500 mm (8' 2"), 3,050 mm (10' 0"), 3,750 mm (12' 4"), 7,850 mm (25' 9"), Arms are available.

DIGGING FORCE

Boom	Length	mm (ft.in)	6,250 (20' 6")				10,200 (33' 6")	Remarks:
	Weight	kg (lb)	2,780 (6,130)				3,530 (7,780)	
Arm	Length	mm (ft.in)	2,100 (6' 11")	2,500 (8' 22")	3,050 (10' 0")	3,750 (12' 4")	7,850 (25' 9")	[]: Power Boost
	Weight	kg (lb)	1,345 (2,970)	1,430 (3,150)	1,545 (3,410)	1,675 (3,690)	1,685 (3,710)	
Bucket digging force	SAE	kN	164.8 [179.8]	165.7 [180.8]	165.7 [180.8]	166.7 [181.9]	70.6	
		kgf	16,800 [18,330]	16,900 [18,440]	16,900 [18,440]	17,000 [18,550]	7,200	
		lbf	37,040 [40,410]	37,260 [40,650]	37,260 [40,650]	37,480 [40,900]	15,870	
	ISO	kN	191.2 [208.6]	191.2 [208.6]	192.2 [209.7]	192.2 [209.7]	82.4	
		kgf	19,500 [21,270]	19,500 [21,270]	19,600 [21,380]	19,600 [21,380]	8,400	
		lbf	42,990 [46,890]	42,990 [46,890]	43,210 [47,130]	43,210 [47,130]	18,520	
Arm crowd force	SAE	kN	180.4 [196.8]	155.9 [170.1]	131.4 [143.4]	114.7 [125.1]	47.1	
		kgf	18,400 [20,070]	15,900 [17,350]	13,400 [14,620]	11,700 [12,780]	4,800	
		lbf	40,570 [44,250]	35,050 [38,250]	29,540 [32,230]	25,790 [28,130]	10,580	
	ISO	kN	190.3 [207.5]	163.8 [178.7]	136.3 [148.7]	119.6 [130.5]	48.1	
		kgf	19,400 [21,160]	16,700 [18,220]	13,900 [15,160]	12,200 [13,310]	4,900	
		lbf	42,770 [46,650]	36,820 [40,170]	30,640 [33,420]	26,900 [29,340]	10,800	

Note : Boom weight includes arm cylinder, piping, and pin. Arm weight includes bucket cylinder, linkage, and pin

LIFTING CAPACITY



HX300AL

6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 5,100 kg counter weight and 600 mm (24") Triple grouser shoe.

Table with columns for Lift-point height, Lift-point radius (1.5m to 9.0m), and At max. Reach. Rows include weight and capacity for various heights and radii.

HX300AL 2-PIECE BOOM

6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 7,500 kg counter weight and 600 mm (24") Triple grouser shoe.

Table with columns for Lift-point height, Lift-point radius (3.0m to 9.0m), and At max. Reach. Rows include weight and capacity for various heights and radii.

1. Lifting capacity is based on ISO 10567. 2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. 3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass). 4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY



HX300AL 2-PIECE BOOM

6.25 m (20' 6") boom, 2.1 m (6' 11") arm equipped with 7,500 kg counter weight and 600 mm (24") Triple grouser shoe.

Table with columns for Lift-point height, Lift-point radius (3.0m to 7.5m), and At max. Reach. Rows include weight and capacity for various heights and radii.

6.25 m (20' 6") boom, 2.5 m (8' 2") arm equipped with 7,500 kg counter weight and 600 mm (24") Triple grouser shoe.

Table with columns for Lift-point height, Lift-point radius (3.0m to 7.5m), and At max. Reach. Rows include weight and capacity for various heights and radii.

1. Lifting capacity is based on ISO 10567. 2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity. 3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass). 4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

Rating over-front
 Rating over-side or 360 degrees

HX300AL LONG REACH


102.0 m (33' 6") boom, 7.85 m (25' 9") arm equipped with 7,000 kg counter weight and 800 mm (32") Triple grouser shoe.

Lift-point height m (ft)		Lift-point radius																	
		1.5m (4.9ft)		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		9.0m (29.5ft)							
12.0 m (39.4ft)	kg																		
	lb																		
10.5 m (34.4 ft)	kg																		
	lb																		
9.0 m (29.5 ft)	kg																		
	lb																		
7.5 m (24.6 ft)	kg																		
	lb																		
6.0 m (19.7 ft)	kg																		
	lb																		
4.5 m (14.8 ft)	kg																		
	lb																		
3.0 m (9.8 ft)	kg					*7,990	*7,990			*4,550	*4,550	*3,870	*3,870						
	lb					*17,610	*17,610			*10,030	*10,030	*8,530	*8,530						
1.5 m (4.9 ft)	kg					*4,090	*4,090	*7,100	*7,100	*5,420	*5,420	*4,460	*4,460						
	lb					*9,020	*9,020	*15,650	*15,650	*11,950	*11,950	*9,830	*9,830						
Ground Line	kg			*1,270	*1,270	*3,050	*3,050	*7,210	7,130	*6,190	5,360	*5,000	4,210						
	lb			*2,800	*2,800	*6,720	*6,720	*15,900	15,720	*13,650	11,820	*11,020	9,280						
-1.5 m (-4.9 ft)	kg	*1,320	*1,320	*1,820	*1,820	*3,130	*3,130	*5,930	*5,930	*6,800	5,000	*5,460	3,940						
	lb	*2,910	*2,910	*4,010	*4,010	*6,900	*6,900	*13,070	*13,070	*14,990	11,020	*12,040	8,690						
-3.0 m (-9.8 ft)	kg	*1,960	*1,960	*2,450	*2,450	*3,590	*3,590	*5,880	*5,880	*7,230	4,760	*5,820	3,750						
	lb	*4,320	*4,320	*5,400	*5,400	*7,910	*7,910	*12,960	*12,960	*15,940	10,490	*12,830	8,270						
-4.5 m (-14.8 ft)	kg	*2,620	*2,620	*3,140	*3,140	*4,230	*4,230	*6,350	6,280	*7,490	4,630	*6,060	3,630						
	lb	*5,780	*5,780	*6,920	*6,920	*9,330	*9,330	*14,000	13,850	*16,510	10,210	*13,360	8,000						
-6.0 m (-19.7ft)	kg	*3,310	*3,310	*3,900	*3,900	*5,040	*5,040	*7,170	6,270	*7,590	4,590	6,130	3,570						
	lb	*7,300	*7,300	*8,600	*8,600	*11,110	*11,110	*15,810	13,820	*16,730	10,120	13,510	7,870						
-7.5 m (-24.6ft)	kg	*4,060	*4,060	*4,760	*4,760	*6,010	*6,010	*8,340	6,350	*7,510	4,610	6,130	3,580						
	lb	*8,950	*8,950	*10,490	*10,490	*13,250	*13,250	*18,390	14,000	*16,560	10,160	13,510	7,890						
-9.0 m (-29.5ft)	kg	*4,900	*4,900	*5,740	*5,740	*7,210	*7,210	*9,080	6,500	*7,240	4,710	*5,960	3,650						
	lb	*10,800	*10,800	*12,650	*12,650	*15,900	*15,900	*20,020	14,330	*15,960	10,380	*13,140	8,050						
-10.5 m (-34.4ft)	kg	*5,840	*5,840	*6,910	*6,910	*8,770	*8,770	*8,360	6,740	*6,720	4,880	*5,540	3,780						
	lb	*12,870	*12,870	*15,230	*15,230	*19,330	*19,330	*18,430	14,860	*14,820	10,760	*12,210	8,330						
-12.0 m (-39.4ft)	kg			*8,380	*8,380	*9,270	*9,270	*7,220	7,080	*5,810	5,140	*4,710	4,020						
	lb			*18,470	*18,470	*20,440	*20,440	*15,920	15,610	*12,810	11,330	*10,380	8,860						

- Lifting capacity is based on ISO 10567.
- Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
- (*) indicates load limited by hydraulic capacity.

Lift-point height m (ft)		Lift-point radius										At max. Reach		
		10.5m (34.4ft)		12.0m (39.4ft)		13.5m (44.3ft)		15.0m (49.2ft)		16.5m (54.1ft)		Capacity		Reach
														m (ft)
12.0 m (39.4ft)	kg					*1,060	*1,060					*750	*750	14.12
	lb					*2,340	*2,340					*1,650	*1,650	(46.3)
10.5 m (34.4 ft)	kg					*1,360	*1,360	*770	*770			*720	*720	15.07
	lb					*3,000	*3,000	*1,700	*1,700			*1,590	*1,590	(49.5)
9.0 m (29.5 ft)	kg					*1,540	*1,540	*1,150	*1,150			*700	*700	15.83
	lb					*3,400	*3,400	*2,540	*2,540			*1,540	*1,540	(51.9)
7.5 m (24.6 ft)	kg					*1,710	*1,710	*1,400	*1,400			*700	*700	16.41
	lb					*3,770	*3,770	*3,090	*3,090			*1,540	*1,540	(53.8)
6.0 m (19.7 ft)	kg					*2,070	*2,070	*1,910	*1,910	*1,600	*1,600	*960	*960	16.83
	lb					*4,560	*4,560	*4,210	*4,210	*3,530	*3,530	*2,120	*2,120	(55.2)
4.5 m (14.8 ft)	kg	*2,620	*2,620	*2,430	*2,430	*2,170	*2,170	*1,810	*1,810	*1,180	*1,180	*730	*730	17.12
	lb	*5,780	*5,780	*5,360	*5,360	*4,780	*4,780	*3,990	*3,990	*2,600	*2,600	*1,610	*1,610	(56.2)
3.0 m (9.8 ft)	kg	*3,420	*3,420	*2,970	*2,970	*2,520	*2,520	*2,030	*2,030	*1,340	*1,340	*760	*760	17.26
	lb	*7,540	*7,540	*6,550	*6,550	*5,560	*5,560	*4,480	*4,480	*2,950	*2,950	*1,680	*1,680	(56.6)
1.5 m (4.9 ft)	kg	*3,840	3,630	*3,420	2,950	*2,960	*2,960	*2,270	2,010	*1,450	*1,450	*810	*810	17.28
	lb	*8,470	8,000	*7,540	6,500	*6,530	5,360	*5,000	4,430	*3,200	*3,200	*1,790	*1,790	(56.7)
Ground Line	kg	*4,230	3,390	*3,710	2,780	*3,340	2,300	*2,500	1,920	*1,480	*1,480	*870	*870	17.16
	lb	*9,330	7,470	*8,180	6,130	*7,360	5,070	*5,510	4,230	*3,260	*3,260	*1,920	*1,920	(56.3)
-1.5 m (-4.9 ft)	kg	*4,580	3,190	*3,980	2,630	*3,540	2,200	*2,680	1,840	*1,380	*1,380	*950	*950	16.90
	lb	*10,100	7,030	*8,770	5,800	*7,800	4,850	*5,910	4,060	*3,040	*3,040	*2,090	*2,090	(55.5)
-3.0 m (-9.8 ft)	kg	*4,870	3,040	*4,200	2,520	3,590	2,110	*2,700	1,790	*1,070	*1,070	*1050	*1050	16.51
	lb	*10,740	6,700	*9,260	5,560	7,910	4,650	*5,950	3,950	*2,360	*2,360	*2,310	*2,310	(54.2)
-4.5 m (-14.8 ft)	kg	5,000	2,940	4,160	2,440	3,530	2,060	*2,460	1,760			*1200	*1200	15.96
	lb	11,020	6,480	9,170	5,380	7,780	4,540	*5,420	3,880			*2,650	*2,650	(52.4)
-6.0 m (-19.7ft)	kg	4,950	2,890	4,120	2,410	3,510	2,040	*1,790	1,760			*1,400	*1,400	15.25
	lb	10,910	6,370	9,080	5,310	7,740	4,500	*3,950	3,880			*3,090	*3,090	(50.0)
-7.5 m (-24.6ft)	kg	4,950	2,900	4,130	2,410	*3,340	2,060					*1,690	*1,690	14.34
	lb	10,910	6,390	9,110	5,310	*7,360	4,540					*3,730	*3,730	(47.0)
-9.0 m (-29.5ft)	kg	*5,000	2,950	4,190	2,480							*2,150	*2,150	13.20
	lb	*11,020	6,500	9,240	5,470							*4,740	*4,740	(43.3)
-10.5 m (-34.4ft)	kg	*4,600	3,080									*3,010	2,680	11.75
	lb	*10,140	6,790									*6,640	5,910	(38.6)
-12.0 m (-39.4ft)	kg											*4,130	3,580	9.86
	lb											*9,110	7,890	(32.4)

LIFTING CAPACITY



HX300ANL

6.25 m (20' 6") boom, 3.05 m (10' 0") arm equipped with 5,100 kg counter weight and 600 mm (24") Triple grouser shoe.


Lift-point height m (ft)	Lift-point radius										At max. Reach					
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach	
															m (ft)	
7.5 m (24.6 ft)	kg													*4,400	*4,400	7.38
	lb													*9,700	*9,700	(24.2)
6.0 m (19.7 ft)	kg									*6,760	5,590			*4,210	*4,210	8.30
	lb									*14,900	12,320			*9,280	*9,280	(27.2)
4.5 m (14.8 ft)	kg					*10,020	*10,020	*8,140	7,690	*7,220	5,400			*4,200	4,010	8.86
	lb					*22,090	*22,090	*17,950	16,950	*15,920	11,900			*9,260	8,840	(29.1)
3.0 m (9.8 ft)	kg					*12,900	10,770	*9,490	7,150	*7,900	5,120	*5,480	3,780	*4,340	3,660	9.14
	lb					*28,440	23,740	*20,920	15,760	*17,420	11,290	*12,080	8,330	*9,570	8,070	(30.0)
1.5 m (4.9 ft)	kg					*15,060	9,760	*10,710	6,620	8,410	4,820	*6,180	3,620	*4,640	3,510	9.17
	lb					*33,200	21,520	*23,610	14,590	18,540	10,630	*13,620	7,980	*10,230	7,740	(30.1)
Ground Line	kg					*15,890	9,210	11,410	6,220	8,120	4,570			*5,150	3,520	8.94
	lb					*35,030	20,300	25,150	13,710	17,900	10,080			*11,350	7,760	(29.3)
-1.5 m (-4.9 ft)	kg	*7,640	*7,640	*11,090	*11,090	*15,730	8,970	11,130	5,990	7,940	4,410			*6,050	3,730	8.44
	lb	*16,840	*16,840	*24,450	*24,450	*34,680	19,780	24,540	13,210	17,500	9,720			*13,340	8,220	(27.7)
-3.0 m (-9.8 ft)	kg	*13,090	*13,090	*17,900	*17,900	*14,740	8,910	11,030	5,900	7,880	4,360			7,720	4,280	7.61
	lb	*28,860	*28,860	*39,460	*39,460	*32,500	19,640	24,320	13,010	17,370	9,610			17,020	9,440	(25.0)
-4.5 m (-14.8 ft)	kg			*17,250	*17,250	*12,540	9,040	*9,180	5,990					*8,450	5,600	6.31
	lb			*38,030	*38,030	*27,650	19,930	*20,240	13,210					*18,630	12,350	(20.7)

6.25 m (20' 6") boom, 2.1 m (6' 11") arm equipped with 5,100 kg counter weight and 600 mm (24") Triple grouser shoe.

Lift-point height m (ft)	Lift-point radius							At max. Reach				
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach	
											m (ft)	
7.5 m (24.6 ft)	kg									*8,230	7,110	6.40
	lb									*18,140	15,670	(21.0)
6.0 m (19.7 ft)	kg									*8,290	7,870	7.44
	lb									*18,280	17,350	(24.4)
4.5 m (14.8 ft)	kg									*9,270	7,450	8.06
	lb									*20,440	16,420	(26.5)
3.0 m (9.8 ft)	kg									*10,480	6,940	8.37
	lb									*23,100	15,300	(27.5)
1.5 m (4.9 ft)	kg									*11,430	6,500	8.40
	lb									*25,200	14,330	(27.6)
Ground Line	kg									11,360	6,200	8.15
	lb									25,040	13,670	(26.8)
-1.5 m (-4.9 ft)	kg			*15,200	9,080	11,190	6,060	8,030	4,500	7,880	4,430	7.60
	lb			*33,510	20,020	24,670	13,360	17,700	9,920	17,370	9,770	(24.9)
-3.0 m (-9.8 ft)	kg	*17,600	*17,600	*13,580	9,130	*10,280	6,070			*8,750	5,310	6.66
	lb	*38,800	*38,800	*29,940	20,130	*22,660	13,380			*19,290	11,710	(21.9)
-4.5 m (-14.8 ft)	kg			*10,000	9,420					*8,240	7,880	5.12
	lb			*22,050	20,770					*18,170	17,370	(16.8)

1. Lifting capacity is based on ISO 10567.
2. Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY



HX300ANL

6.25 m (20' 6") boom, 2.5 m (8' 2") arm equipped with 5,100 kg counter weight and 600 mm (24") Triple grouser shoe.

Lift-point height m (ft)	Lift-point radius										At max. Reach												
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach										
													m (ft)										
7.5 m (24.6 ft)	kg												*7,410	*7,410	*6,770	6,630	6.74						
	lb												*16,340	*16,340	*14,930	14,620	(22.1)						
6.0 m (19.7 ft)	kg												*7,780	*7,780	*7,410	5,480	*6,440	5,170	7.74				
	lb												*17,150	*17,150	*16,340	12,080	*14,200	11,400	(25.4)				
4.5 m (14.8 ft)	kg												*11,180	*11,180	*8,810	7,550	*7,740	5,330	*6,420	4,420	8.34		
	lb												*24,650	*24,650	*19,420	16,640	*17,060	11,750	*14,150	9,740	(27.4)		
3.0 m (9.8 ft)	kg												*14,020	10,410	*10,080	7,020	*8,330	5,070	*6,640	4,020	8.64		
	lb												*30,910	22,950	*22,220	15,480	*18,360	11,180	*14,640	8,860	(28.3)		
1.5 m (4.9 ft)	kg														*11,150	6,540	8,370	4,800	6,680	3,840	8.67		
	lb														*24,580	14,420	18,450	10,580	14,730	8,470	(28.4)		
Ground Line	kg												*16,030	9,160	11,370	6,210	8,120	4,580	6,830	3,880	8.43		
	lb												*35,340	20,190	25,070	13,690	17,900	10,100	15,060	8,550	(27.6)		
-1.5 m (-4.9 ft)	kg												*11,140	*11,140	*15,490	9,020	11,160	6,020	7,980	4,460	7,410	4,160	7.89
	lb												*24,560	*24,560	*34,150	19,890	24,600	13,270	17,590	9,830	16,340	9,170	(25.9)
-3.0 m (-9.8 ft)	kg												*19,040	17,680	*14,130	9,030	*10,700	5,990			*8,730	4,890	6.99
	lb												*41,980	38,980	*31,150	19,910	*23,590	13,210			*19,250	10,780	(22.9)
-4.5 m (-14.8 ft)	kg												*15,060	*15,060	*11,270	9,240					*8,760	6,870	5.55
	lb												*33,200	*33,200	*24,850	20,370					*19,310	15,150	(18.2)

6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 5,100 kg counter weight and 600 mm (24") Triple grouser shoe.

Lift-point height m (ft)	Lift-point radius										At max. Reach														
	1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach										
															m (ft)										
9.0 m (29.5 ft)	kg													*3,820	*3,820	*3,820				6.87					
	lb													*8,420	*8,420	*8,420				(22.5)					
7.5 m (24.6 ft)	kg															*5,120	*5,120				*3,490	*3,490	8.14		
	lb															*11,290	*11,290				*7,690	*7,690	(26.7)		
6.0 m (19.7 ft)	kg																				*6,010	*3,370	8.97		
	lb																				*13,250	7,430	(29.4)		
4.5 m (14.8 ft)	kg																								
	lb																								
3.0 m (9.8 ft)	kg																								
	lb																								
1.5 m (4.9 ft)	kg																								
	lb																								
Ground Line	kg																								
	lb																								
-1.5 m (-4.9 ft)	kg	*7,060	*7,060	*10,560	*10,560	*15,790	8,960	11,140	5,980	7,920	4,380	*5,710	3,360	*4,750	3,300	*4,750	3,300	9.11							
	lb	*15,560	*15,560	*23,280	*23,280	*34,810	19,750	24,560	13,180	17,460	9,660	*12,590	7,410	*10,470	7,280	*10,470	7,280	(29.9)							
-3.0 m (-9.8 ft)	kg	*11,090	*11,090	*15,460	*15,460	*15,260	8,800	10,950	5,820	7,790	4,270			*5,900	3,680	*5,900	3,680	8.35							
	lb	*24,450	*24,450	*34,080	*34,080	*33,640	19,400	24,140	12,830	17,170	9,410			*13,010	8,110	*13,010	8,110	(27.4)							
-4.5 m (-14.8 ft)	kg	*15,980	*15,980	*19,530	17,330	*13,710	8,840	*10,210	5,820					*7,970	4,550										

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degrees

HX300AL HIGH WALKER

6.25 m (20' 6") boom, 2.5 m (8' 2") arm equipped with 5,100 kg counter weight and 700 mm (28") Double grouser shoe.

Lift-point height m (ft)		Lift-point radius										At max. Reach				
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Reach				
														m (ft)		
7.5 m (24.6 ft)	kg lb							*7,410 *16,340	*7,410 *16,340					*6,650 *14,660	*6,650 *14,660	7.01 (23.0)
6.0 m (19.7 ft)	kg lb							*7,970 *17,570	*7,970 *17,570	*7,440 *16,400	7,330 16,160			*6,410 *14,130	*6,410 *14,130	7.90 (25.9)
4.5 m (14.8 ft)	kg lb					*11,840 *26,100	*11,840 *26,100	*9,090 *20,040	*9,090 *20,040	*7,860 *17,330	7,130 15,720			*6,450 *14,220	5,880 12,960	8.43 (27.7)
3.0 m (9.8 ft)	kg lb							*10,360 *22,840	9,480 20,900	*8,470 *18,670	6,850 15,100			*6,730 *14,840	5,470 12,060	8.67 (28.4)
1.5 m (4.9 ft)	kg lb					*13,230 *29,170	*13,230 *29,170	*11,320 *24,960	9,000 19,840	*9,000 *19,840	6,580 14,510			*7,290 *16,070	5,340 11,770	8.64 (28.3)
Ground Line	kg lb					*15,970 *35,210	*15,970 *35,210	*11,740 *25,880	8,680 19,140	9,140 20,150	6,370 14,040			7,830 17,260	5,500 12,130	8.33 (27.3)
-1.5 m (-4.9 ft)	kg lb			*13,230 *29,170	*13,230 *29,170	*15,270 *33,660	*15,270 *33,660	*11,490 *25,330	8,520 18,780	*8,890 *19,600	6,270 13,820			*8,520 *18,780	6,030 13,290	7.72 (25.3)
-3.0 m (-9.8 ft)	kg lb			*18,360 *40,480	*18,360 *40,480	*13,660 *30,120	*13,660 *30,120	*10,300 *22,710	8,530 18,810					*8,780 *19,360	7,310 16,120	6.72 (22.1)
-4.5 m (-14.8 ft)	kg lb					*10,160 *22,400	*10,160 *22,400							*8,640 *19,050	*8,640 *19,050	5.10 (16.7)

- Lifting capacity is based on ISO 10567.
- Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
- (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY


Rating over-front Rating over-side or 360 degrees

HX300AL HIGH WALKER

6.25 m (20' 6") boom, 3.75 m (12' 4") arm equipped with 5,100 kg counter weight and 700 mm (28") Double grouser shoe.

Lift-point height m (ft)		Lift-point radius										At max. Reach						
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		Capacity		Reach		
																m (ft)		
9.0 m (29.5 ft)	kg lb														*3,720 *8,200	*3,720 *8,200	7.21 (23.6)	
7.5 m (24.6 ft)	kg lb													*5,440 *11,990	*5,440 *11,990	*3,450 *7,610	*3,450 *7,610	8.36 (27.4)
6.0 m (19.7 ft)	kg lb													*6,110 *13,470	*6,110 *13,470	*3,880 *8,550	*3,880 *8,550	9.12 (29.9)
4.5 m (14.8 ft)	kg lb													*7,560 *16,670	*7,560 *16,670	*6,730 *14,840	*6,730 *14,840	9.58 (31.4)
3.0 m (9.8 ft)	kg lb													*9,010 *26,680	*9,010 *26,680	*7,510 *16,560	6,990 15,410	9.79 (32.1)
1.5 m (4.9 ft)	kg lb													*14,450 *31,860	14,030 30,930	*10,330 *22,770	9,200 20,280	9.76 (32.0)
Ground Line	kg lb													*11,210 *24,710	8,750 19,290	*8,820 *19,440	6,370 14,040	9.49 (31.1)
-1.5 m (-4.9 ft)	kg lb	*7,940 *17,500	*7,940 *17,500	*11,560 *25,490	*11,560 *25,490	*15,740 *34,700	12,960 28,570	*11,530 *25,420	8,460 18,650	8,930 19,690	6,170 13,600			*4,950 *10,910	4,790 10,560	8.96 (29.4)		
-3.0 m (-9.8 ft)	kg lb	*12,090 *26,650	*12,090 *26,650	*16,810 *37,060	*16,810 *37,060	*15,010 *33,090	12,840 28,310	*11,160 *24,600	8,330 18,360	*8,620 *19,000	6,080 13,400			*6,300 *13,890	5,460 12,040	8.12 (26.6)		
-4.5 m (-14.8 ft)	kg lb	*17,320 *38,180	*17,320 *38,180	*18,640 *41,090	*18,640 *41,090	*13,160 *29,010	12,930 28,510	*9,740 *21,470	8,370 18,450					*8,050 *17,750	6,970 15,370	6.85 (22.5)		
-6.0 m (-19.7 ft)	kg lb					*8,890 *19,600	*8,890 *19,600							*8,130 *17,920	*8,130 *17,920	4.80 (15.8)		

- Lifting capacity is based on ISO 10567.
- Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
- (*) indicates load limited by hydraulic capacity.

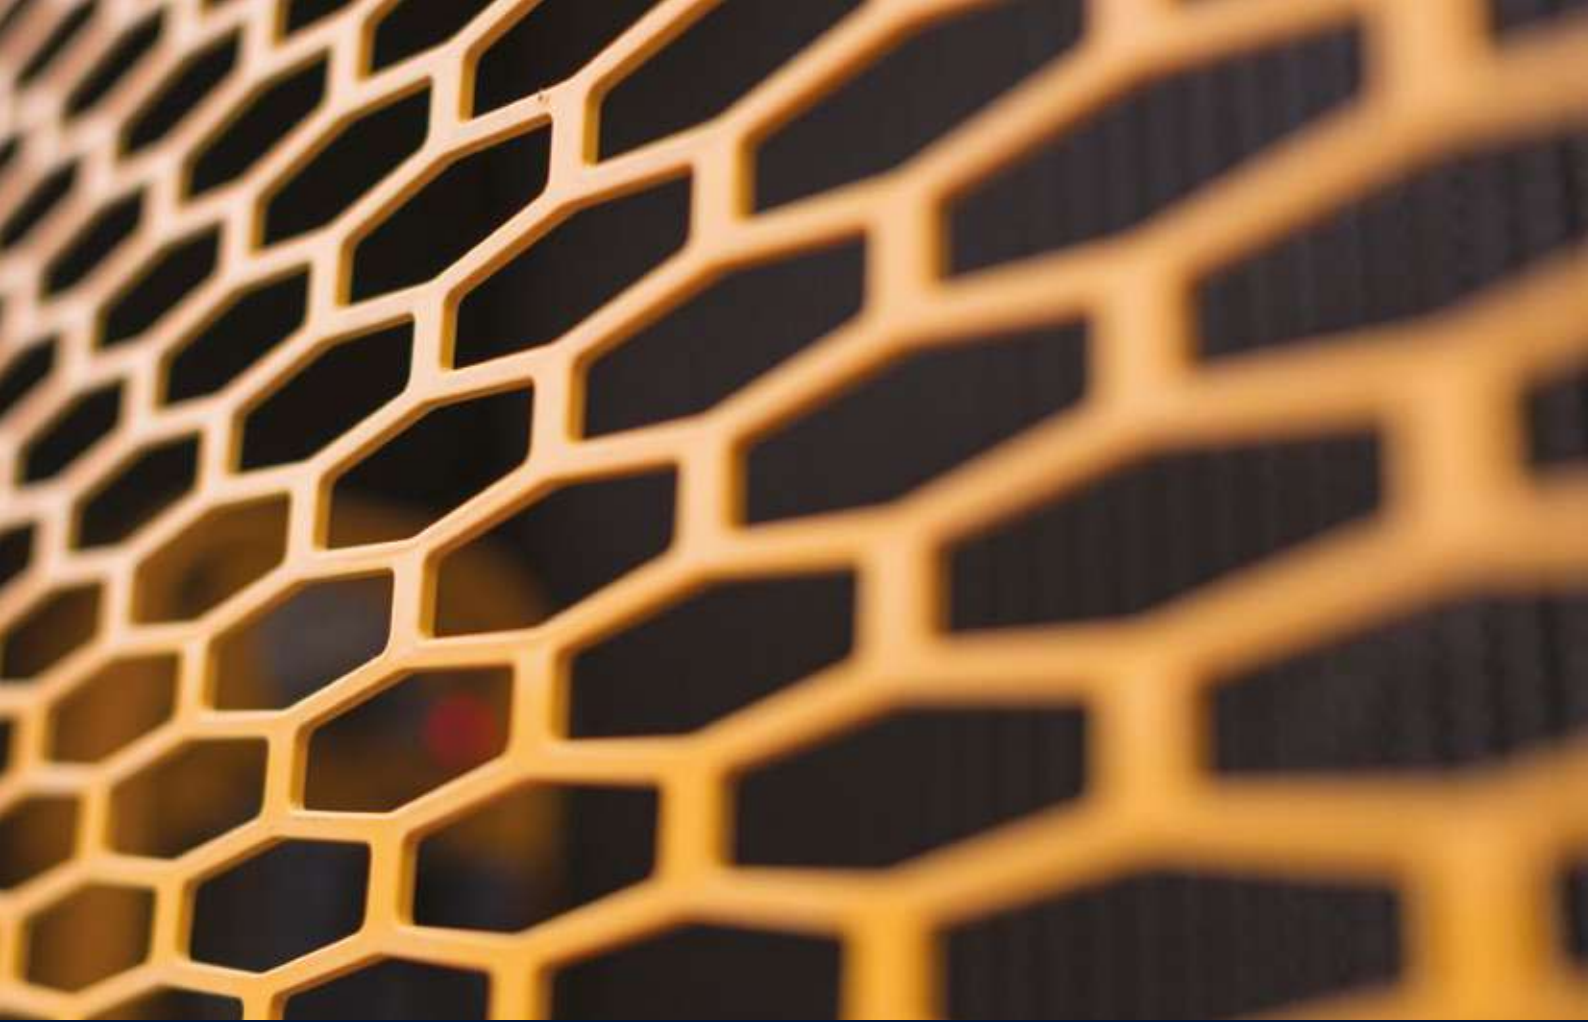

Specifications and design are subject to change without notice. Pictures of Hyundai Construction Equipment Europe products may show other than standard equipment.

Hyundai Construction Equipment Europe nv, Hyundailaan 4, 3980 Tessenderlo, Belgium. Tel: (32) 14-56-2200 Fax: (32) 14-59-3405

EN-2019_10 Rev. 0

Ready to experience the Hyundai Effect?

Contact your Hyundai dealer.

hyundai-ce.eu/en/dealer-locator

